


Features

1. Renew appearance to improve sense quality
2. Renew the lock structure to improve products reliability.



4F210-08L


Ordering Code

4F	2	10	08	L
Specification	Series	Position Number	Port Size	Type
4F: 5/2 way foot valve	2: 200 Series	10: Single head double position	08 : G1/4"	Blank : Standard type L: With lock G: With protecting cover LG: With lock and protecting cover

Specification

Model	4F210-08	4F210-08L	4F210-08G	4F210-08LG
Working Medium	40 Micron Filtered Air			
Position Number	5/2 way			
Port Size	Inlet, Outlet, Exhaust Port = G1/4"			
Operation	Direct			
Working Pressure	0 ~ 0.8MPa			
Working Temp.	-20 ~ 70°C			

Internal Structure

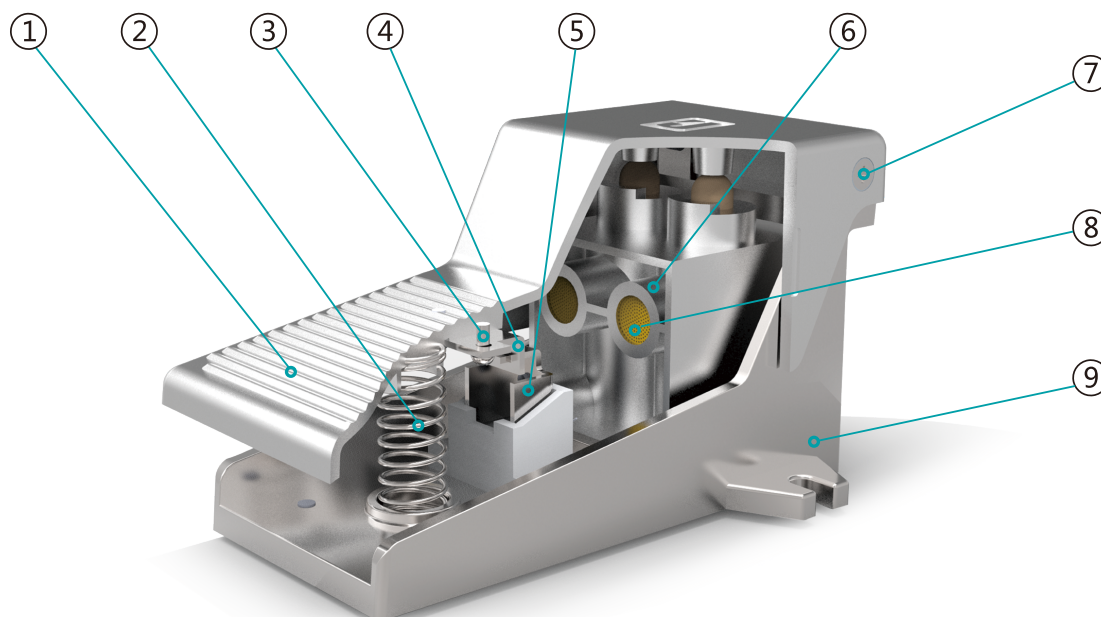

Parts

Number	Name	Number	Name	Number	Name
1	Pedal	4	Hook	7	Screw
2	Spring	5	Lock	8	Sliencer
3	Screw	6	Valve body	9	Valve base

Valve

J4V
 J4V100
 J4V200
 J4V300
 J4V400
 Manifold
 JSY
 Terminal
 JVT
 JEL
 MVSD
 VF
 NAMUR
 551
 JEL10
 3VJZF
 Diaphragm
 JELVD
 3V1
 Coil
 2P
 2V
 2W
 2W(big)
 2L
 VX
 PU
 PU225
 2Q
 JEL5404
 JEL6213
 Pulse
 JELJZF
 4H
 TSV
 MPV
 4HV
 HV, K
 4R
4F210
 FV
 MSV
 JM
 ASC, RE
 QE, QEA
 ST
 HSV

4F210 Series

Foot Valve



Valve

J4V

J4V100

J4V200

J4V300

J4V400

Manifold

JSY

Terminal

JVT

JEL

MVSD

VF

NAMUR

551

JEL10

3VJZF

Diaphragm

JELVD

3V1

Coil

2P

2V

2W

2W(big)

2L

VX

PU

PU225

2Q

JEL5404

JEL6213

Pulse

JELJZF

4H

TSV

MPV

4HV

HV, K

4R

4F210

FV

MSV

JM

ASC, RE



QE, QEA

ST


HSV

Overall Dimension


4F210-08

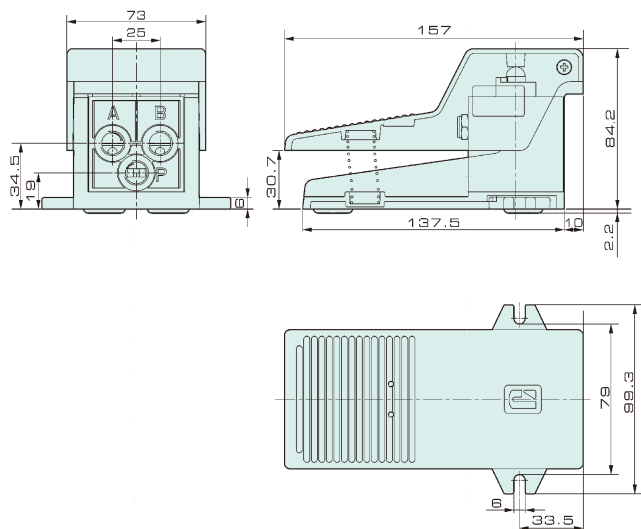

4F210-08L

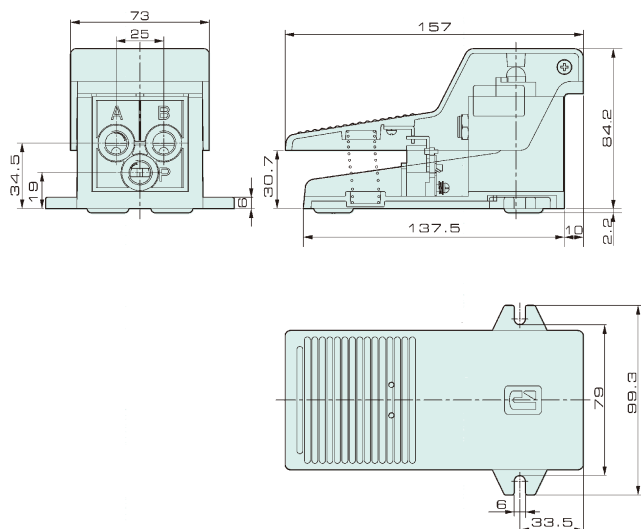

4F210-08G

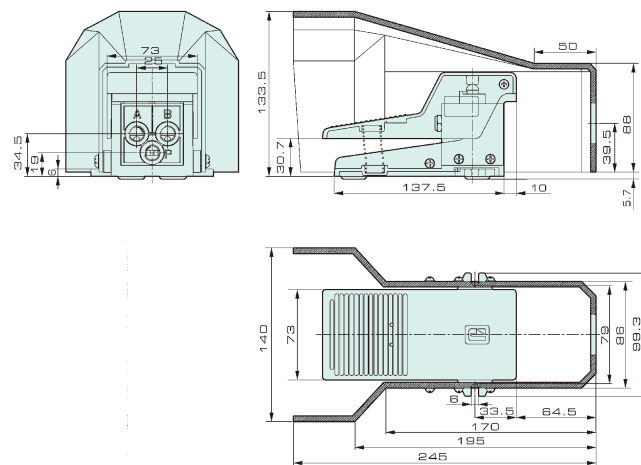

4F210-08LG

