



JAL2000




JAL4000

Ordering Code

JA	L	4000	04	N
Series	Function	Specification	Port Size	Wiring Form
JAL2000-02	Lubricator	1000	M5: M5 x 0.8	Blank: Standard
		2000	01: G1/8"	N: Metal cup
		3000	02: G1/4"	
JAL3000-03		4000	03: G3/8"	
		5000	04: G1/2"	
			06: G3/4"	
			10: G1"	

Symbol



Specification

Model	JAL1000-M5	JAL2000-01	JAL2000-02	JAL3000-02	JAL3000-03	JAL4000-03	JAL4000-04	JAL4000-06	JAL5000-06	JAL5000-10
Rated Flow	95	800	800	1700	1700	5000	5000	6300	7000	7000
Port Size	M5	1/8	1/4	1/4	3/8	3/8	1/2	3/4	3/4	1
Max. Adjustable Pressure	1.0 MPa									
Proof Pressure Resistance	1.5 MPa									
Operating Temperature Range	5 ~ 60°C									
Recommended Lubricant	ISO VG 32									
Container Material	Poly Carbonate									
Container Cup	Unavailable				Iron					

FRL

AC,BC

AFC,BFC

AF,BF

AR,BR

AFR,BFR

AL,BL

JAC

JAF

JAR

JAW

JAL

FE

GC

ZYR10

JAD


MPX

EPX

Overall Dimension

JAW Series 1000~5000 Filter & Regulator

JAW

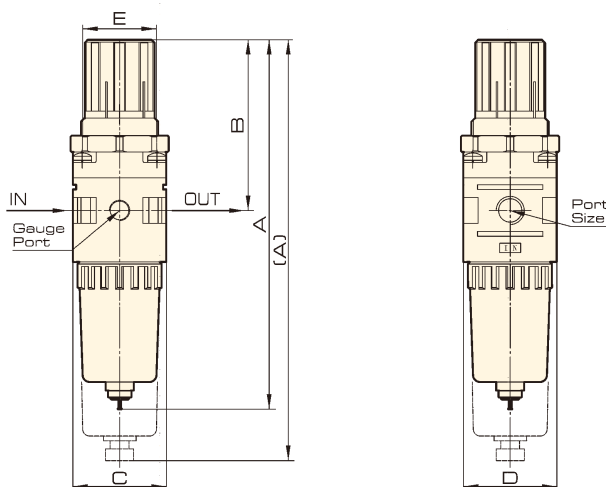


Dimension

Model	Bore	A	B	C	D	E
JAW1000	M5	109.5	50.5	25	28	28
JAW2000	1/8 - 1/4	158 (180)	73	40	40	34
JAW3000	1/4 - 3/8	211	92.5	53	53	40
JAW4000	3/8 - 1/2	262	112	70	70	54
JAW4000-06	3/4	267	114	70	70	54
JAW5000	3/4 - 1	338	116	90	90	54

JAL Series 1000~5000 Lubricator

Overall Dimension

JAL

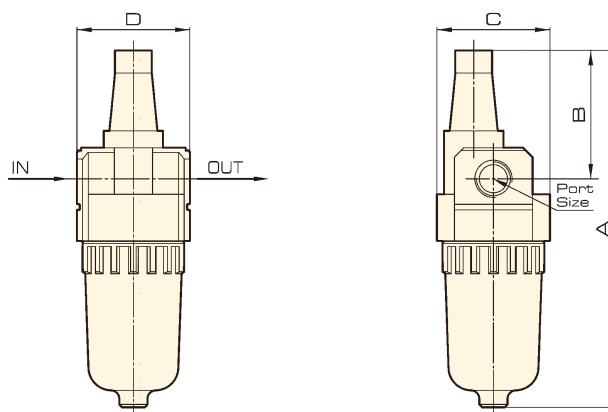

Dimension

Model	Bore	A	B	C	D
JAL1000	M5	81.5	25.5	25	-
JAL2000	1/8 - 1/4	126.5	45.5	40	40
JAL3000	1/4 - 3/8	142	38	53	53
JAL4000	3/8 - 1/2	177	41	70	70
JAL4000-06	3/4	177	39	70	70
JAL5000	3/4 - 1	254	45	90	90