



Valve

J4V
J4V100
J4V200
J4V300
J4V400
Manifold
JSY
Terminal

JVT

JEL
MVSD
VF
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV

Features

- 1、 Direct-acting type, quick response;
- 2、 Coaxial direct-acting, good sealing;
- 3、 No lubrication required;
- 4、 Manual override facilitates machine set up;
- 5、 Many voltages available.

Ordering Code

JVT317	08	DC12V	W	□
Specification	Port Size	Voltage	Wiring	Thread
JVT317	08:G1/4	DC12V DC24V	Blank: Brown with light terminal W: Lead wire	Blank: G P: PT N: NPT

Specification

Model	JVT317
Working Medium	Air (40 Micron dry filtered air)
Port Size	Inlet, Outlet, Exhaust Port=G1/4"
Position	3/2 way
Flow	400L/min
Lubrication	No Need
Working Pressure	0 ~ 1.0MPa
Max Pressure	1.5MPa
Working Temperature	-10 ~ 80°C
Body Materials	Aluminum
Standard Voltage	DC12V, DC24V
Operating Voltage Range	±10%
Power Consumption	6.3W
Connector Protection	IP65
Temperature class	H class
Wiring/Connector	Cable / Lead Wire or DIN Connector
Switching Frequency	5 Cycles/Sec

JVT317

Solenoid Valve (Direct Operated)




Valve
J4V
J4V100
J4V200
J4V300
J4V400
Manifold
JSY
Terminal

JVT
JEL
MVSD
VF
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV

Overall Dimension

JVT317 Terminal Type

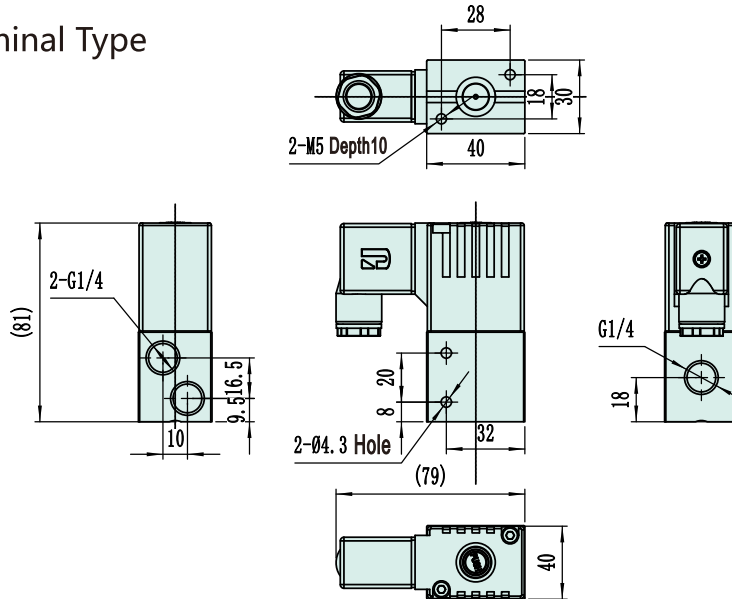

JVT317 Lead wire Type

