

MVSD Series

Solenoid Valve



Valve

J4V
J4V100
J4V200
J4V300
J4V400
Manifold
JSY
Terminal
JVT
JEL


MVSD

VF
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(big)
2L
VX
PU
PU225
2Q
JEL5404
JEL6213
Pulse
JELJZF
4H


TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV



MVSD-260-4E1

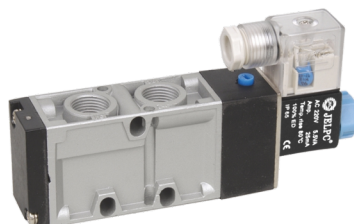

MVSD-300-4E1

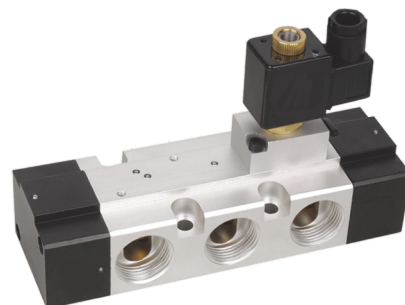

MVSD-600-4E1

Ordering Code


MVSD	260	4	E2	AC110V	W
Code	Body Width	4:5 Way	Stop Type	Standard Voltage	Wiring
	260: 26mm 300: 30mm 600: 68mm		E1: Single coil E2: Double coil	DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	LD: Brown with light terminal LD1: White with light terminal W: Lead wire

Specification


Item	MVSD-260-4E1	MVSD-260-4E2	MVSD-260-4E2 (C.PE)	MVSD-300-4E1	MVSD-300-4E2	MVSD-300-4E2 (C.PE)	MVSD-600-4E1	MVSD-600-4E2
No. of Position	2	2	3	2	2	3	2	
No. of Port	5			5	5		5	
Port Size	G1/4"			G3/8"			G3/4"	G1"
Working Medium	Air							
Working Pressure	0.2 ~ 0.7MPa		0.3 ~ 0.7MPa	0.2 ~ 0.7MPa		0.3 ~ 0.7MPa	0.2 ~ 0.7MPa	
Max. Test Pressure	10kgf/cm ²							
Effective Cross Section Area	18mm ²		16mm ²	35mm ²		25mm ²	20: 115mm ² 25: 135mm ²	
Ambient Temperature	-20 ~ 70°C (No Freezing)							
Power Consumption	AC:5.5VA DC:4.8W						AC:13VA	DC:10W
Operating Voltage Tolerance	±10%							
Insulation Class	IP 65, F Class							

Overall Dimension


MVSD260-4E1

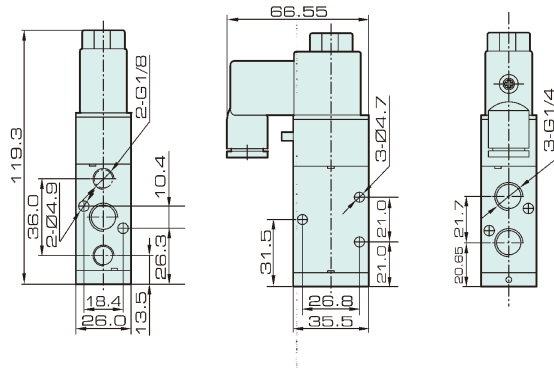


MVSD300-4E1

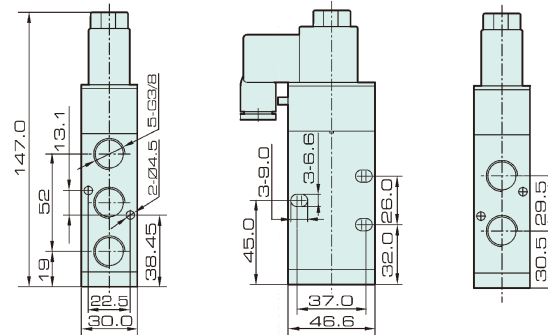

MVSD600-4E1

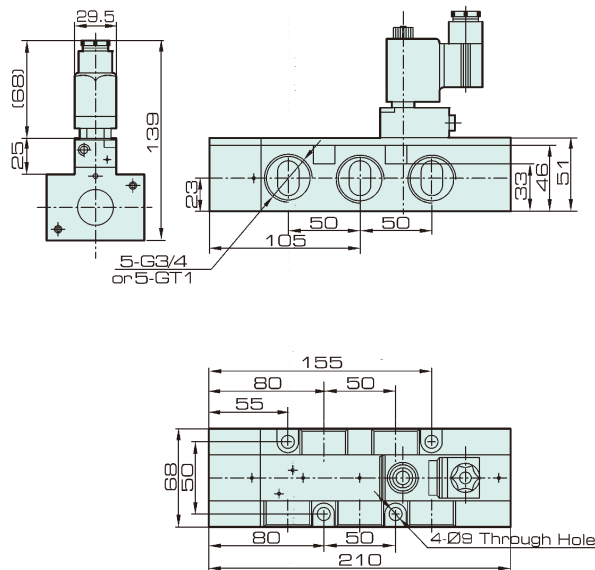

MVSD600-4E2

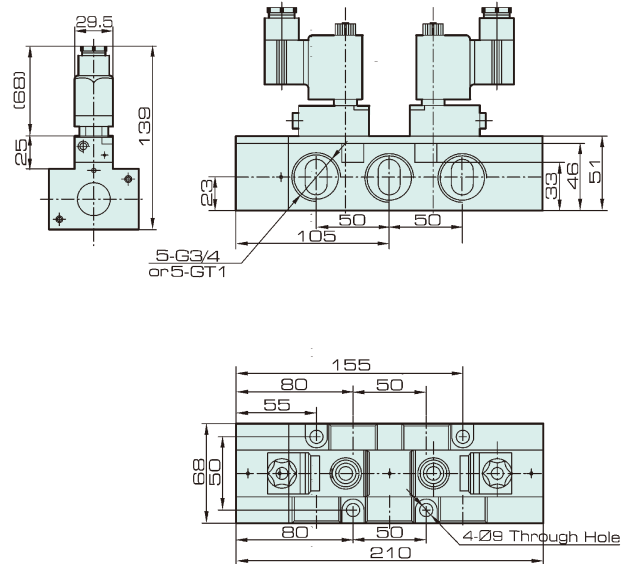

Valve

J4V

J4V100

J4V200

J4V300

J4V400

Manifold

JSY

Terminal

JVT

JEL

MVSD

VF

NAMUR

551

JEL10

3VJZF

Diaphragm

JELVD

3V1

Coil

2P

2V

2W

2W(big)

2L

VX

PU

PU225

2Q

JEL5404

JEL6213

Pulse

JELJZF

4H

TSV

MPV

4HV

HV, K

4R

4F210

FV

MSV

JM

ASC, RE

QE, QEA

ST

HSV