



PU220-04-J



PU220-06-J




PU220-08-J

Ordering Code

PU	220	01	AC110V	E	J
Specification	Operation	Port Size	Standard Voltage	Sealing	Wiring
PU 2/2 Way	220: Direct	01: 1/8"	DC12V DC24V	Blank: NBR	J: Terminal
		02: 1/4"	AC24V 50Hz/60Hz	E: EPDM for steam	W: Lead wire
		03: 3/8"	AC110V 50Hz/60Hz	V: VITON (for high temperature, gas, vacuum)	
		04: 1/2"	AC220V 50Hz/60Hz		
		06: 3/4"	AC380V 50Hz/60Hz		
		08: 1"			

Symbol




Specification

Model	PU220-01	PU220-02	PU220-03	PU220-04	PU220-06	PU220-08
Working Medium	Air, Water, Oil					
Operation	Direct					
Type	Normal Close					
Orifice	1.5mm	2.3mm	8.0mm	13mm	20mm	25mm
CV Value	0.10	0.18	1.00	4.00	8.60	11.00
Port Size	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Operation Fluid Viscosity	Below 50 CST					
Working Pressure	0 ~ 0.7MPa					
Max. Test Pressure	1.05MPa					
Max. Ambient Temperature	-10 ~ 80°C					

Overall Dimension

PU

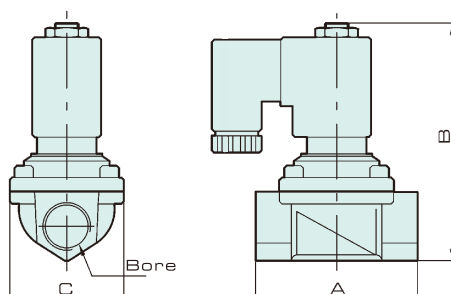

Dimension

Model	Bore	A	B	C
PU220-01	PT1/8	22	72	22
PU220-02	PT1/4	35	75.5	25.4
PU220-03	PT3/8	55	79.5	30
PU220-04	PT1/2	66.5	101	48
PU220-06	PT3/4	71	107	48
PU220-08	PT1	96	120	70

Valve

J4V
J4V100
J4V200
J4V300
J4V400
Manifold
JSY
Terminal
JVT
JEL
MVSD
VF
NAMUR
551
JEL10
3VJZF
Diaphragm
JELVD
3V1
Coil
2P
2V
2W
2W(big)
2L
VX

PU

PU225
2Q
JEL5404
JEL6213
Pulse
JELJZF
4H
TSV
MPV
4HV
HV, K
4R
4F210
FV
MSV
JM
ASC, RE
QE, QEA
ST
HSV