

AC, BC Series

Three-devices Combination
(F.R.L. Combination)



FRL

AC,BC

AFC,BFC

AF,BF

AR,BR

AFR,BFR

AL,BL

JAC

JAF

JAR

JAW

JAL

FE

GC

ZYR10

JAD

MPX

EPX



AC(1500-2000)




BC(2000-4000)

Ordering Code

BC	3000	D
Model	Port Size	Drain Type
AC: Small	1500: G1/8"	Blank: Semi-automatic
	2000: G1/4"	D: Automatic
	3000: G3/8"	* Not applied to AC
BC: Medium	4000: G1/2"	

Symbol





Specification



Model		AC1500	AC2000	BC2000	BC3000	BC4000
Operating Fluid		Air				
Port Size		G1/8"	G1/4"	G1/4"	G3/8"	G1/2"
Filter Precision		40 μ				
Range of Adjustable Pressure		0.05 ~ 0.85 MPa				
Max. Adjustable Pressure		0.95 MPa				
Proof Pressure Resistance		1.5 MPa				
Operating Temperature Range		5 ~ 60°C				
Capacity of Filter Cup		15 cc			60 cc	
Capacity of oil Cup		25 cc			90 cc	
Recommended Lubricant		ISO VG 32 or Same Grade Oil				
Weight		0.7 KG			0.9 KG	
Material	Body	Aluminum Alloy Die-casting Forming				
	Container Cup	PC				
	Protective Cover	Iron				
Components	Filter Regulator	AF1500	AF2000	BF2000	BF3000	BF4000
	Regulator	AR1500	AR2000	BR2000	BR3000	BR4000
	Lubricator	AL1500	AL2000	BL2000	BL3000	BL4000

Overall Dimension

AC

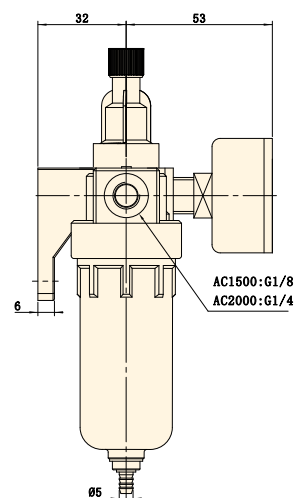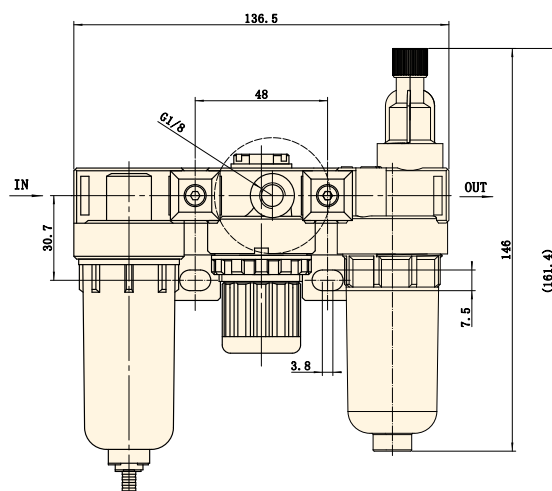

BC

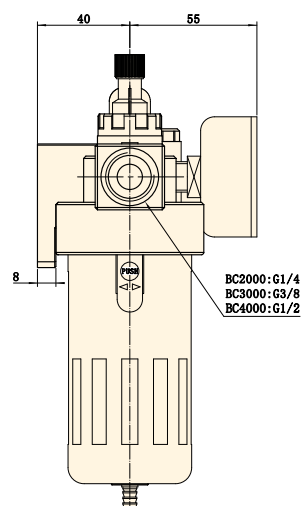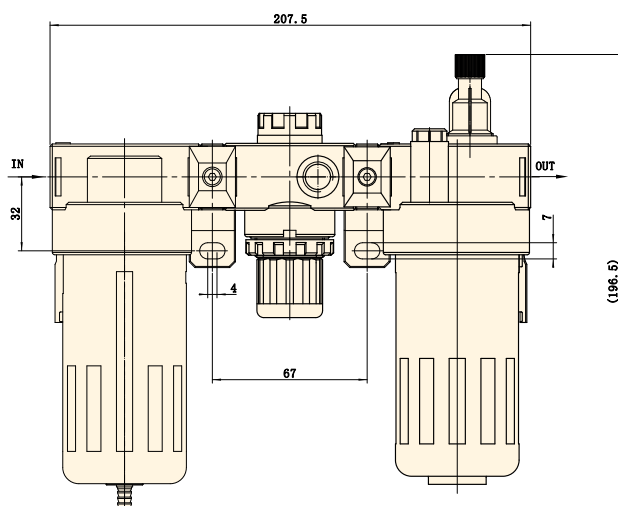

FRL

AC,BC

AFC,BFC

AF,BF

AR,BR

AFR,BFR

AL,BL

JAC

JAF

JAR

JAW

JAL

FE

GC

ZYR10

JAD

MPX

EPX